


**Important: Always disconnect the power before installing or replacing bulbs and before cleaning or other maintenance.**

This light should be installed by a licensed electrician

### LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box. (fig. A)
2. Attach the mounting plate to the outlet box, secure with outlet box screws. Use anchors and wood screws for extra support (included).
3. Make appropriate electrical connections using wire nuts:
  - a. Connect the fixture's live wire (black) to the live outlet box wire.
  - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
  - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
  - d. Carefully place connections in outlet box.
4. Attach the back plate to the mounting plate, secure with cap nuts.
5. Attach the metal shade to the back plate by inserting the posts into the keyholes on the back plate, then sliding the metal shade toward the small end of the keyhole.
6. Restore power to the fixture.

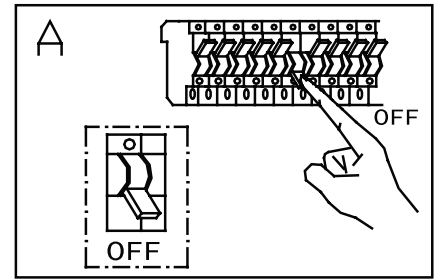

### CARE INSTRUCTIONS

Dusting – Use a clean, dry cloth.  
Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

**NOTE: This fixture is dimmable with Electronic Low Voltage (Trailing-Edge) and Incandescent (Leading-Edge) type dimmers. For best performance, we recommend using an Electronic Low Voltage dimmer.**

