



Installation Guide

Picture 1

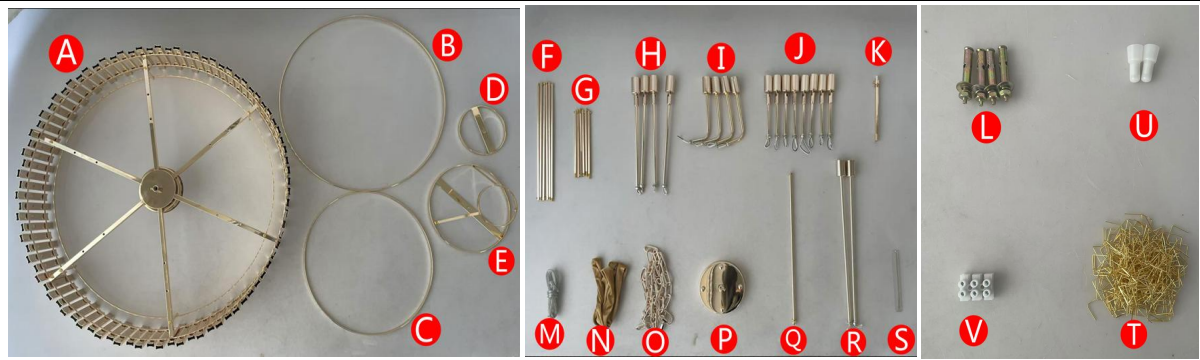


Check products and accessories: A*1; B*1; C*1; D*1; E*1; F*6; G*6; H*4; I*4; J*8; K*1; L Screw 45mm*4; M*1; N*1; O*1; P*1; Q*1; R*2; S*204; T*204; U cap *2; V terminal *1
Installation time: 50Min. Number of installations: 1. Installation difficulty: 1

Picture 2

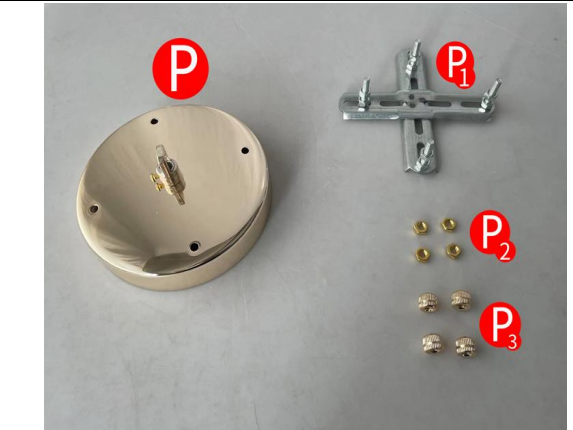

Step 1: As shown in the picture, remove the P2 and P3 accessories preinstalled on P; Use the hanging plate P1 to fix the hole position on the wall, and then use the screw L*4 to fix the hanging plate P1 on the ceiling.

Picture 3

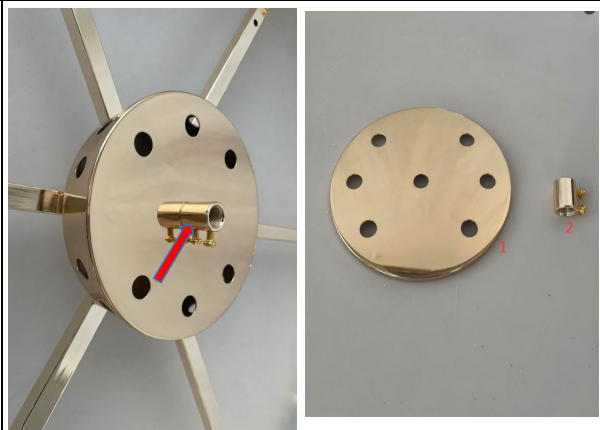


Step2: as shown in the picture remove the part from the lamp body (A).

Picture 4




Step 3: As shown, install I*4, J*8 inside the lamp; Put H*4; R*2, mounted on 6-hole fitting (fixed nut and gasket pre-installed on lamp arm)

Picture 5

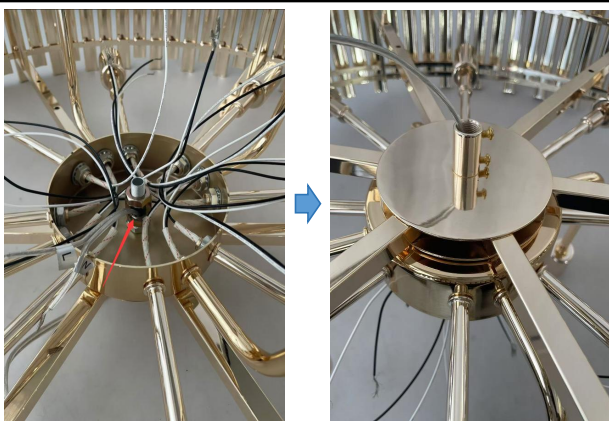

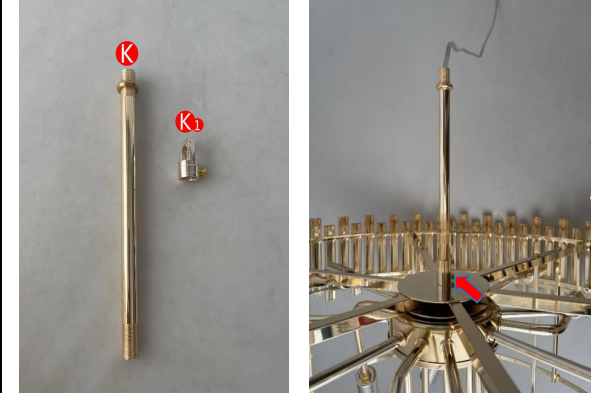
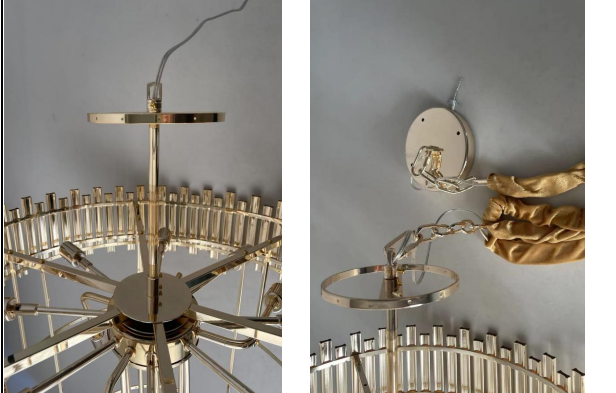
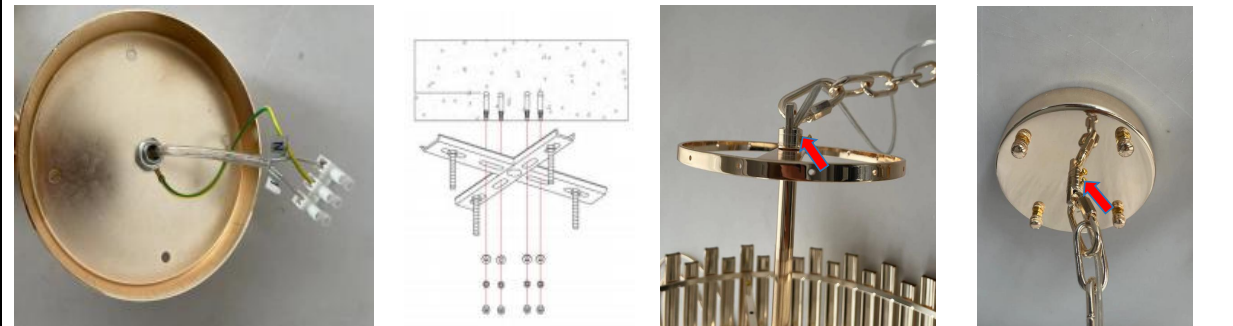
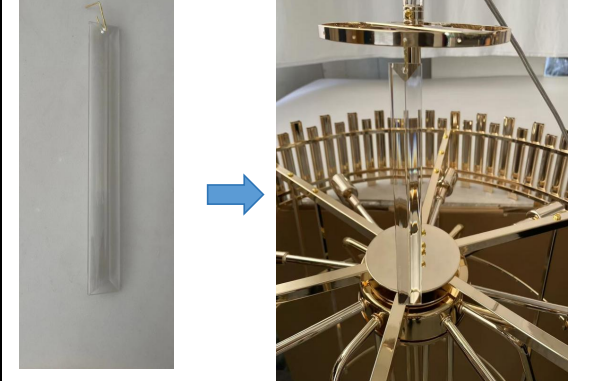



Step 4: As shown in the picture thread out the line (M) from the bottom of the cluster body.

Picture 6

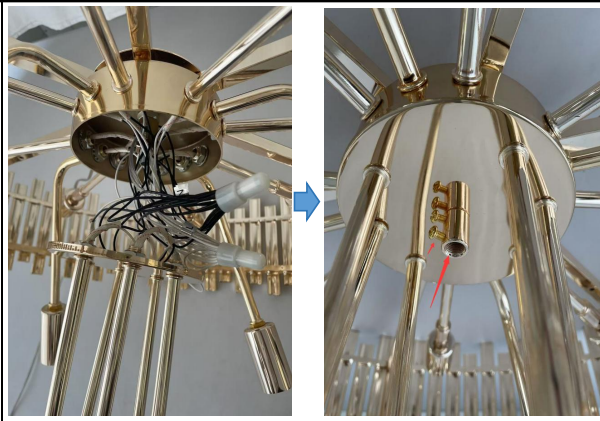

Step 5: As shown in the picture, all the white wires of the light arm are connected with the "N" end of the main line M, all the black wires are connected with the "L" end of the main line, and are insulated with the wire cap U, and the arrow position is fixed with the connector.
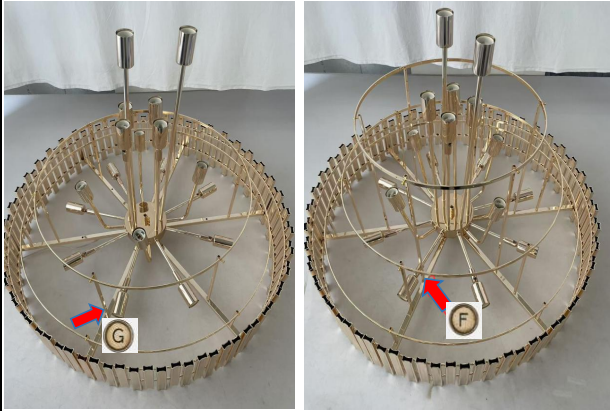
<p align="center">Picture 7</p> 	<p align="center">Picture 8</p> 
<p>Step 6: As shown in the picture, use G to fix B to the second circle of light frame A, and use F to fix C to the third circle of light frame A.</p>	<p>Step 7: Secure E at the bottom of the lamp (A) with Q.</p>
<p align="center">Picture 9</p> 	<p align="center">Picture 10</p> 
<p>Step 8: Divide k into K1, install K on the light frame (A), and tighten 2 screws.</p>	<p>Step 9: Firmly fix D on the installed K with K1, and the wire M is inserted into N O. One end of O is connected to K, while the other end is connected to P above (the length of O can be adjusted as needed).</p>
<p align="center">Picture 11</p> 	
<p>Step 10: Connect the zero line, fire line, and ground line into the terminal, then access the home power supply. Fix the suction top plate with P2 and P3, and tighten the screws at both ends of the arrow and the link (O).</p>	
<p align="center">Picture 12</p> 	<p align="center">Picture 13</p> 
<p>Step 11: Connect the crystal (S) with the hanging pin (T) and hang it on the installed lamp stand (install the light source first and try to light it with no problem before hanging the crystal, the light source is not provided)</p>	<p align="center">Installation completed.</p>