



Installation Guide

Picture 1

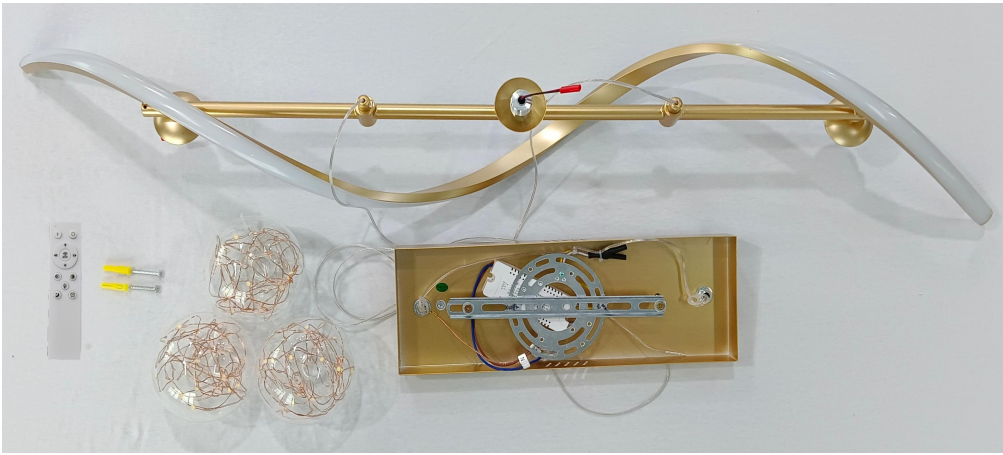


Parts List:self-tapping screws and glue sleeve:M4*30mm,lampshade100mm*3

Picture 2

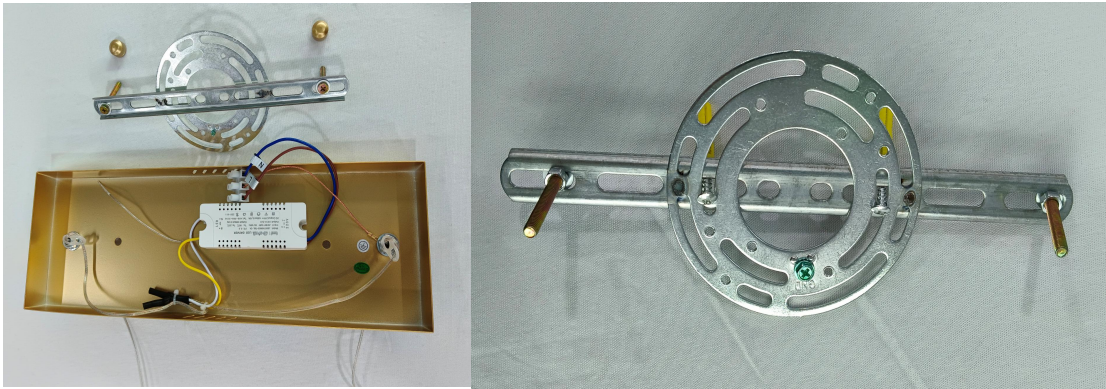

Step 1:Remove the pegboard from the chassis and fix it to the ceiling with self-tapping screws.Note: you can test the light normal work before doing this step.

Picture 3

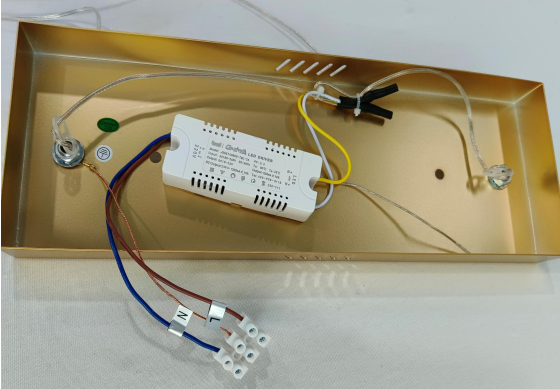


Step 2:As shown in the picture, the power cord into the terminal. (red wire for L, blue wire for N)

Picture 4



Step 3:Screw in the chassis as shown.

Picture 5

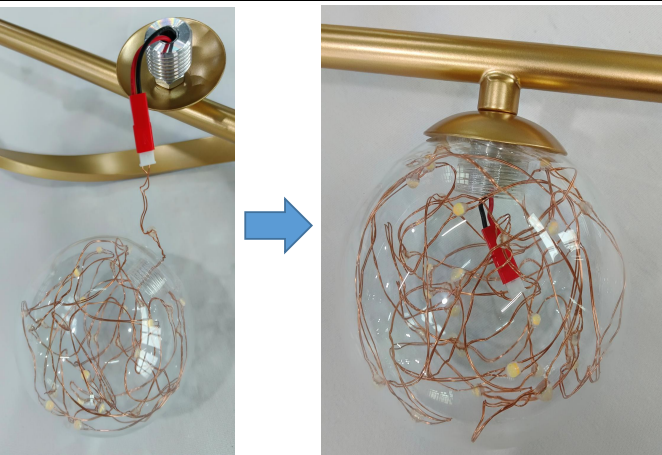


Step 4:As shown in the picture, connect the light source and screw the lampshade.

Picture 6



Completion.

12 Key Remote Control Manual is successful

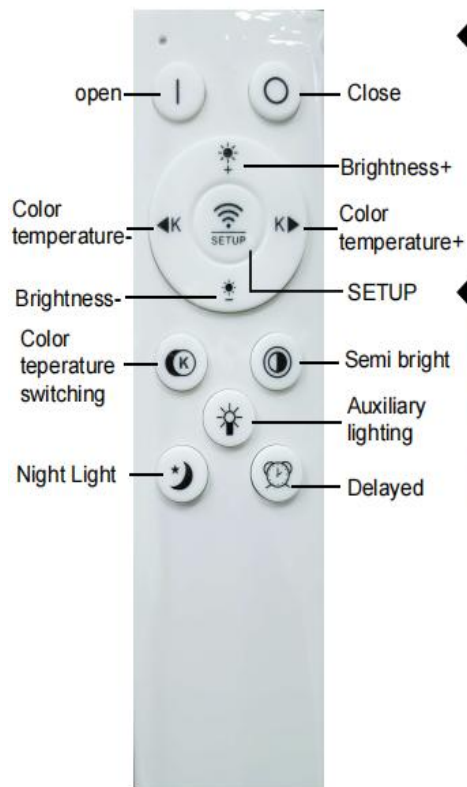

◆ **Pairing with lights**
Press and hold the "SETUP" button on the remote control for 3 seconds, and the light flashes 3 times. Pairing

◆ **Delete pairing.**
Press and hold the "on" button on the remote control for 3 seconds, and the light will flash 3 times to delete pairing