



# Specifications

## DESCRIPTION

- Solid brass construction
- Premium finish resist corrosion and tarnishing
- Anti-scald pressure balance valve
- Ultra-thin shower head with air injection technology
- Handshower with backflow protection
- 59" PVC hose for enhanced flexibility
- Diverter knob switch water between shower head and handshower


## FLOW

- Shower head maximum 2 gpm (7.6 L/min)
- Handshower maximum 2 gpm (7.6 L/min)

## CARTRIDGE


- Ceramic disk cartridge
- Pressure-balanced valve

## STANDARDS

- Certified to cUPC
- Comply with ASME A112.18.1/CSA B125.1
- ADA  for lever handle



## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects from the original date of purchase. (Improper care and cleaning will void the warranty)
- 5-year warranty if used in commercial installations

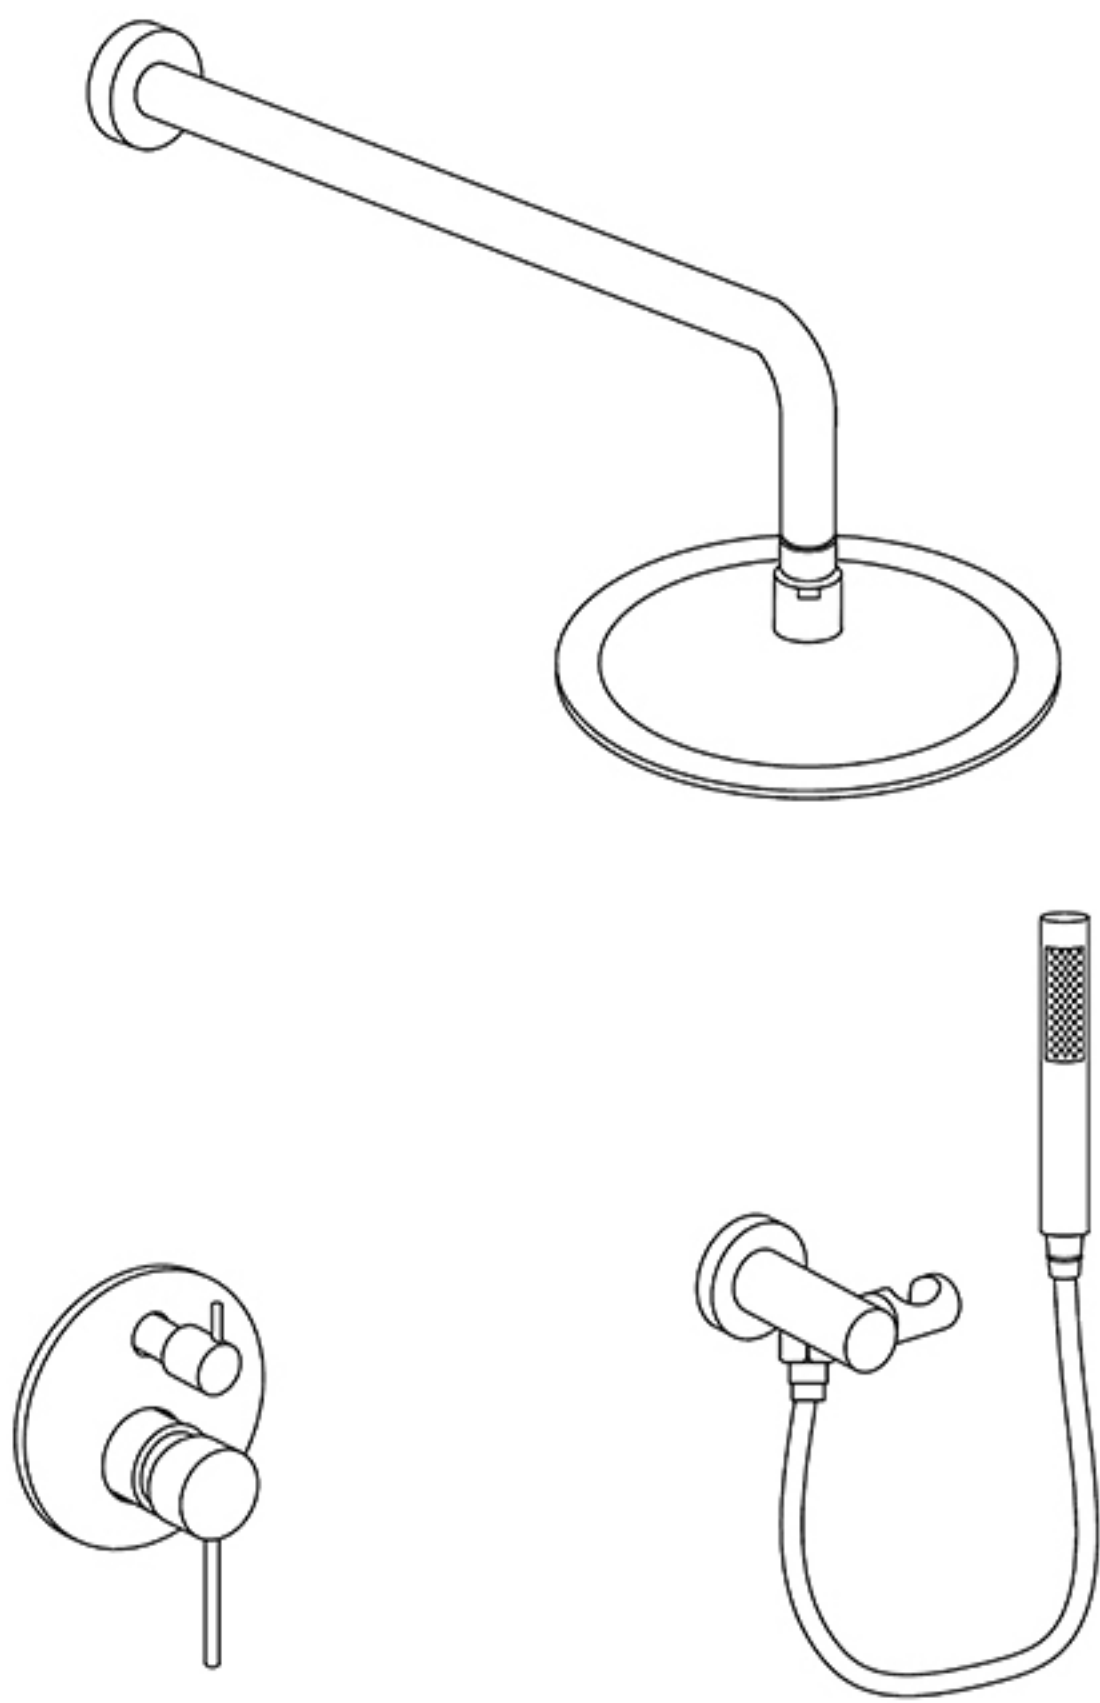

### Wall Mount Shower System # HMUS-020014

NOTE: THIS SHOWER SYSTEM IS DESIGNED TO BE INSTALLED WITH 1/2" NPT CONNECTION.

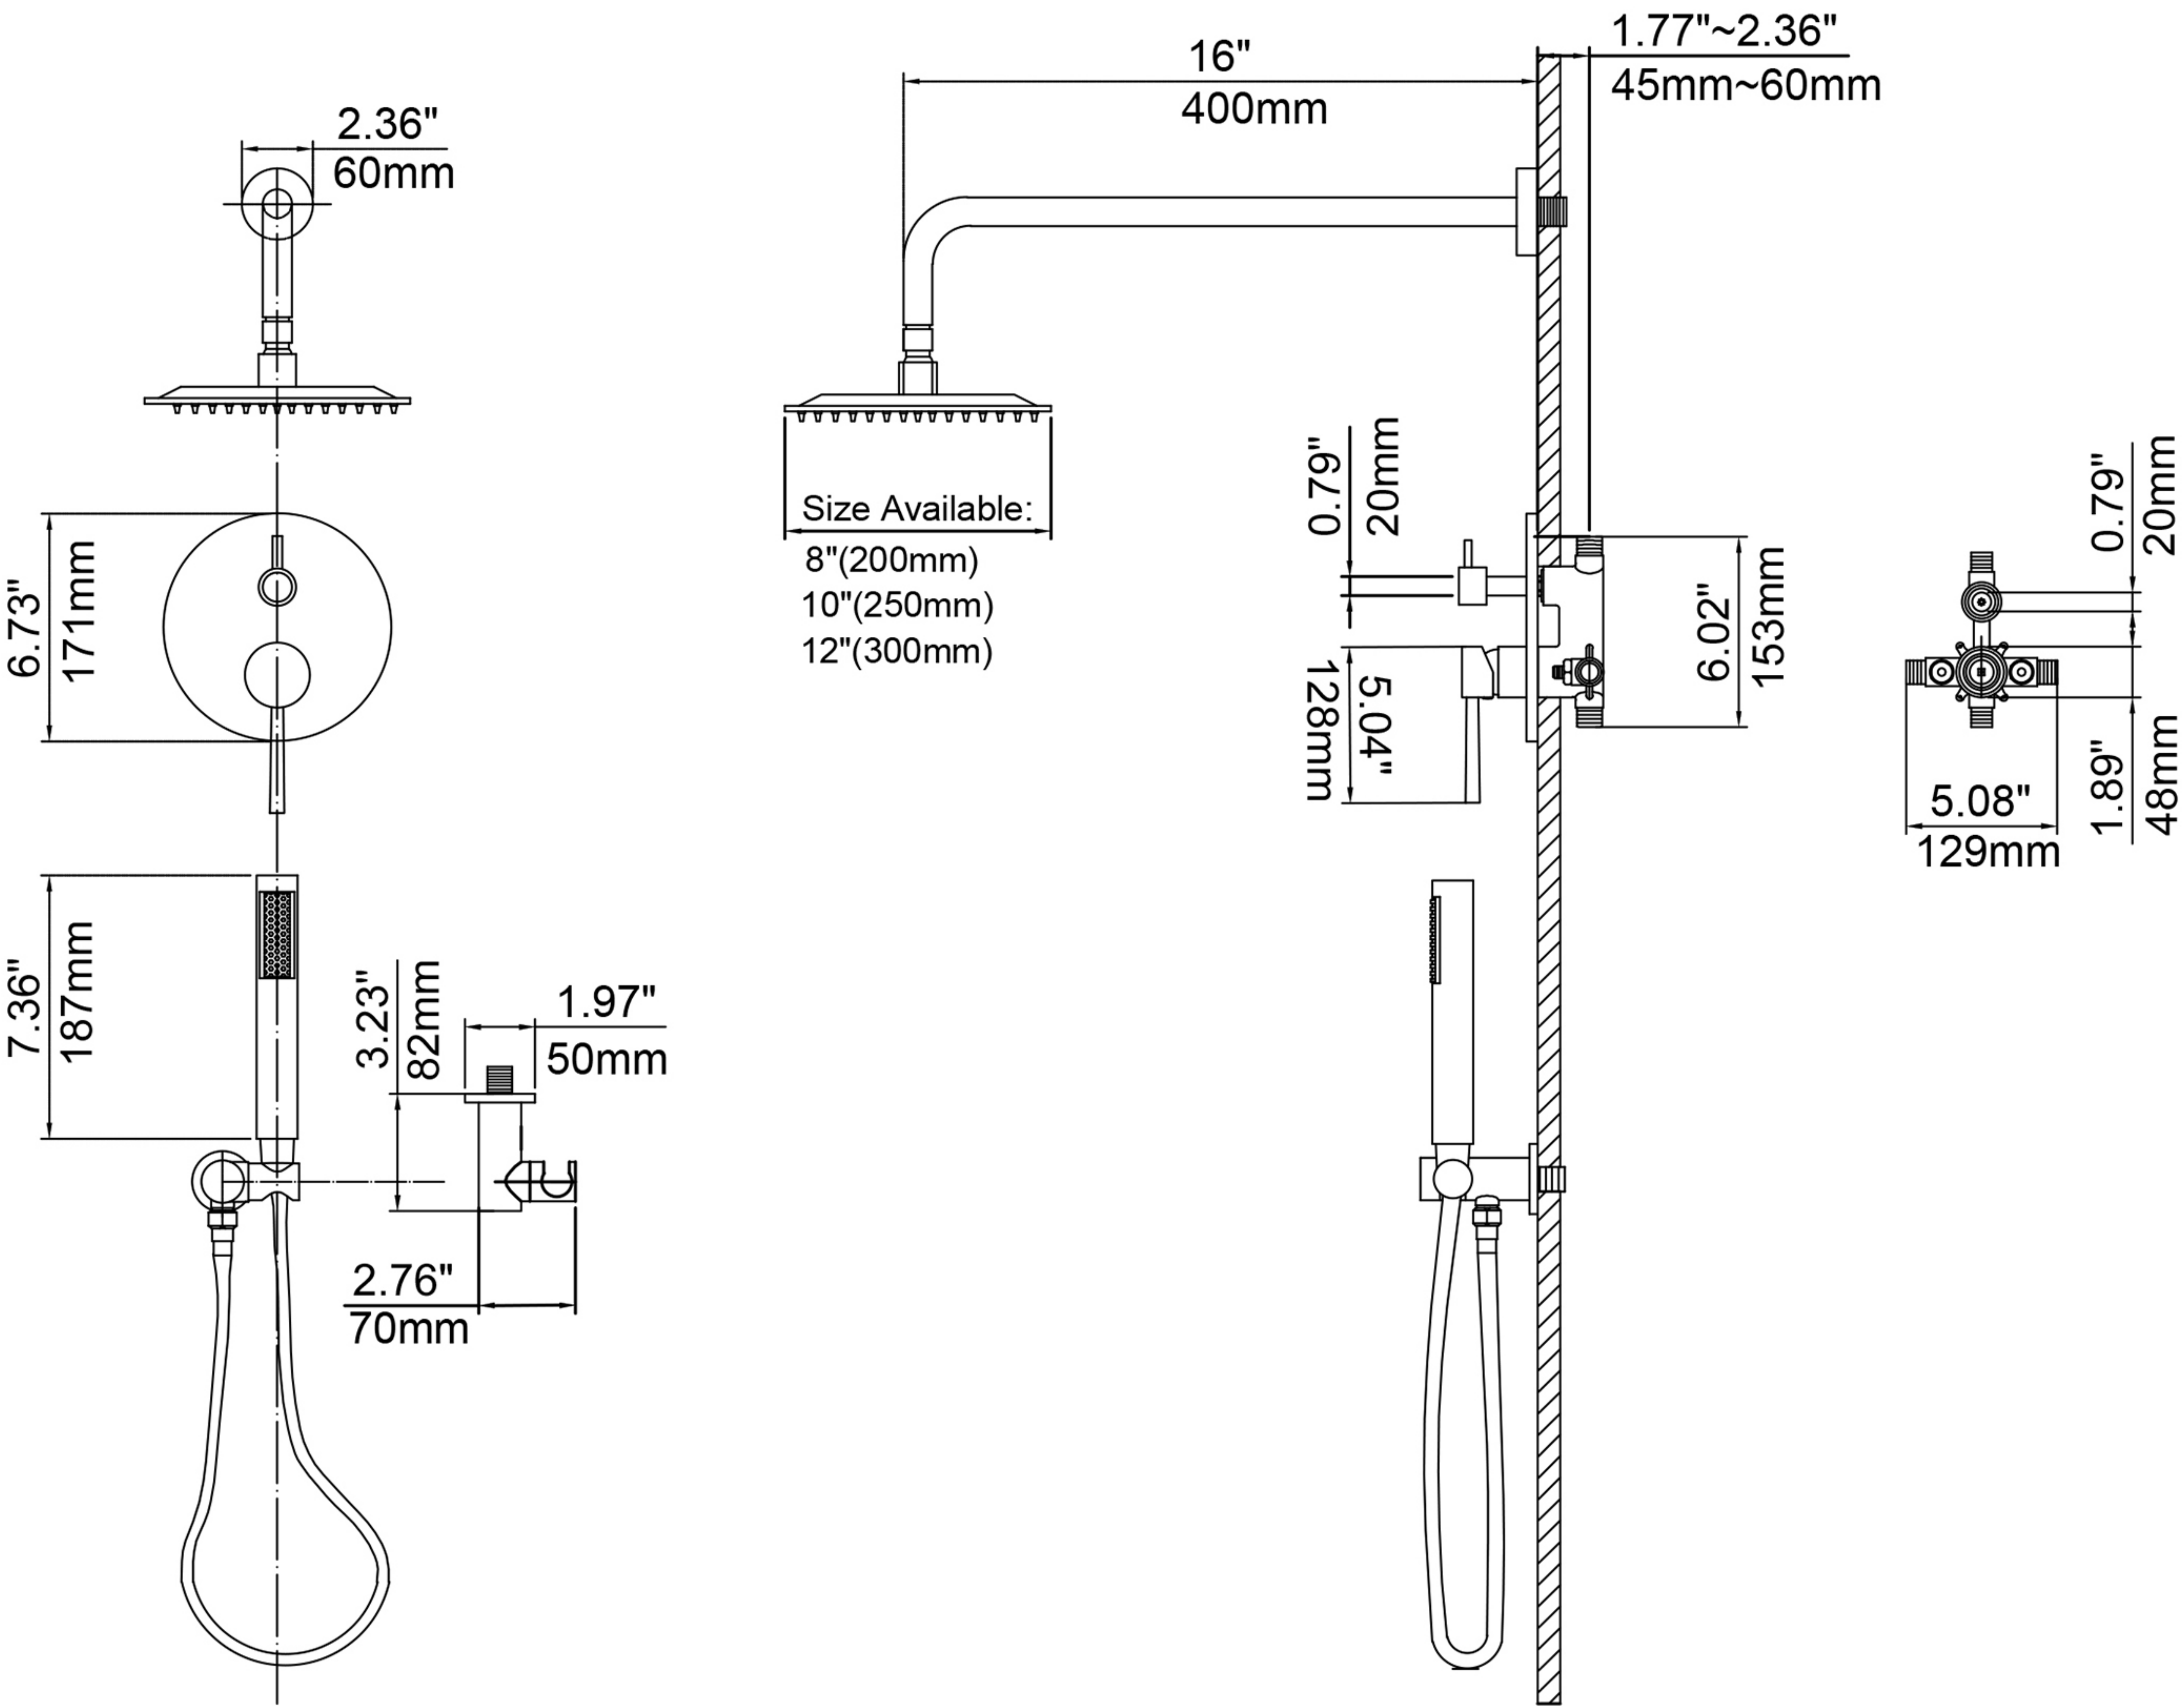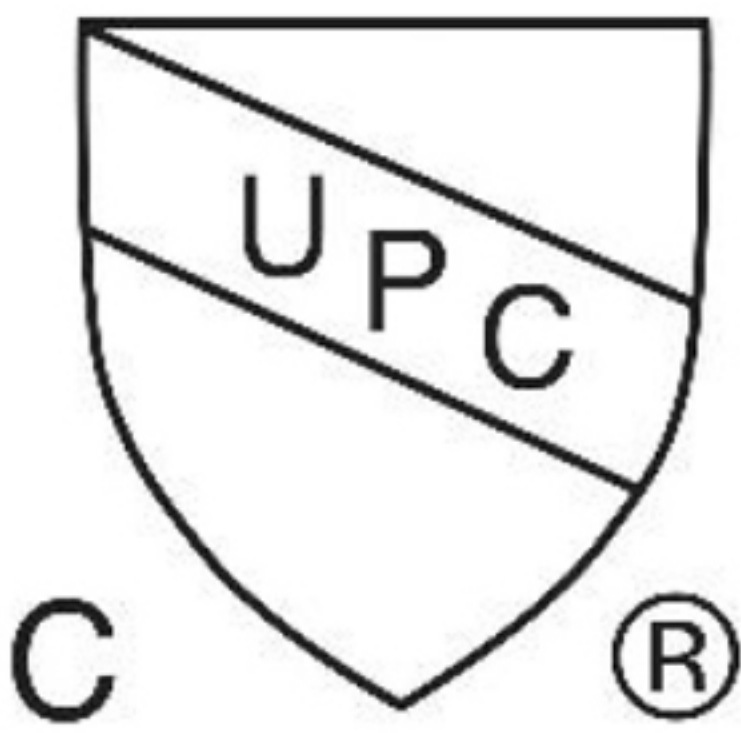

CRITICAL DIMENSIONS