Light Fixture Installation

Tools Required:







Before Inatallation

1. please read these instructions before assembling or installing the product. **NOTE:** Inatallation by a licensed electrian is recommended


2. Take out the fixture and mounting package and make sure all parts are included. If any part is missing or damaged, please contact us.

3.All parts must be used as indicated in these instructions. Do not substitute any parts, leave parts out, or use any parts that are worn out or broken.

4.Do not disassemble the main body, as it has beed installed & commissioned correctly & precisely before leaving the factory.

5. IMPORTANT: Turn off the main power at the circuit breaker and piace the wall switch or pull chain in the "OFF" position.


6.Do not use bulbs with wattage greater than specified on this fixture

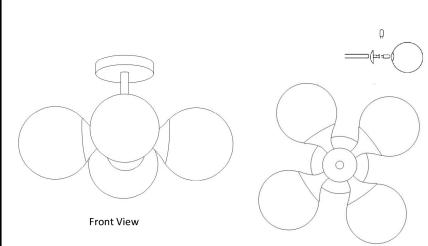


Top View

Part	Name	Quantity
Α	expansionanchors	4
В	mounting strap	1
С	screws	4
E	canopy	1
F	Flat head screw	4
G	Terminals	1


Installation Guide




1. Shut off power before installation. Mark holes in the ceiling and drill holes. Then install the expansion anchors (A) in the ceiling.



2. Fix the mounting strap (b) to the ceiling with screws(C).



3.Connect the live (red) and null (black) wires of the starter at one end to corresponding colored wires of the light fiture. Cover them with wire connectors, At the other end, connect the live and null wires of the stater to yours, Insert the starter in the canopy.

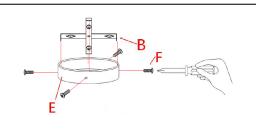

4. Attach the canopy (E) to the mounting strap (B) and fix it with Flat head screw (F). Turn on the power and test.

Troubleshooting			
problem	Possible Cause	Corrective Action	
Fixture does not light.	1.Fixture may be wired incorrectly	1.Check wiring.	
	2.Worn or broken bulb.	2.Replace bulb.	
	3.Lamp socket or LED transformer	3.Replace lamp socket or	
	(if applicable) may go bad.	LED transtormer(if applicable)	
Light bulb fickers.	1.Switch Contacts are bad	1.Replace the switch.	
	2. Wire connections are loose.	2.Checkwire connections	
	3.Light bulb socket may go bad.	3.Replace the socket.	