# Installation Instruction

## Before You Begin

1. Shut off the main water supply.
2. Do not disassemble the main body, as it has been installed & commissioned correctly & precisely before leaving the factory.
3. To avoid the faucet from jamming, DO flush the water pipe before installation.
4. After installation, make sure every joint is safely sealed (NO LEAKAGE).
5. Make sure to connect the hot/cold inlet pipe correctly, if standing in front, hot water pipe connecting to the left and cold water pipe connecting to the right.
6. It is recommended that installation of the product be done by a professional plumber.

## Cleaning & Maintenance

To keep product clean and shiny follow the instruction below.
1. Flush with clean water and dry with soft cloth only.
2. Do not use any detergent, polisher, sane-cloth, or a scraper.
3. Do not use acid detergent.

## Installation

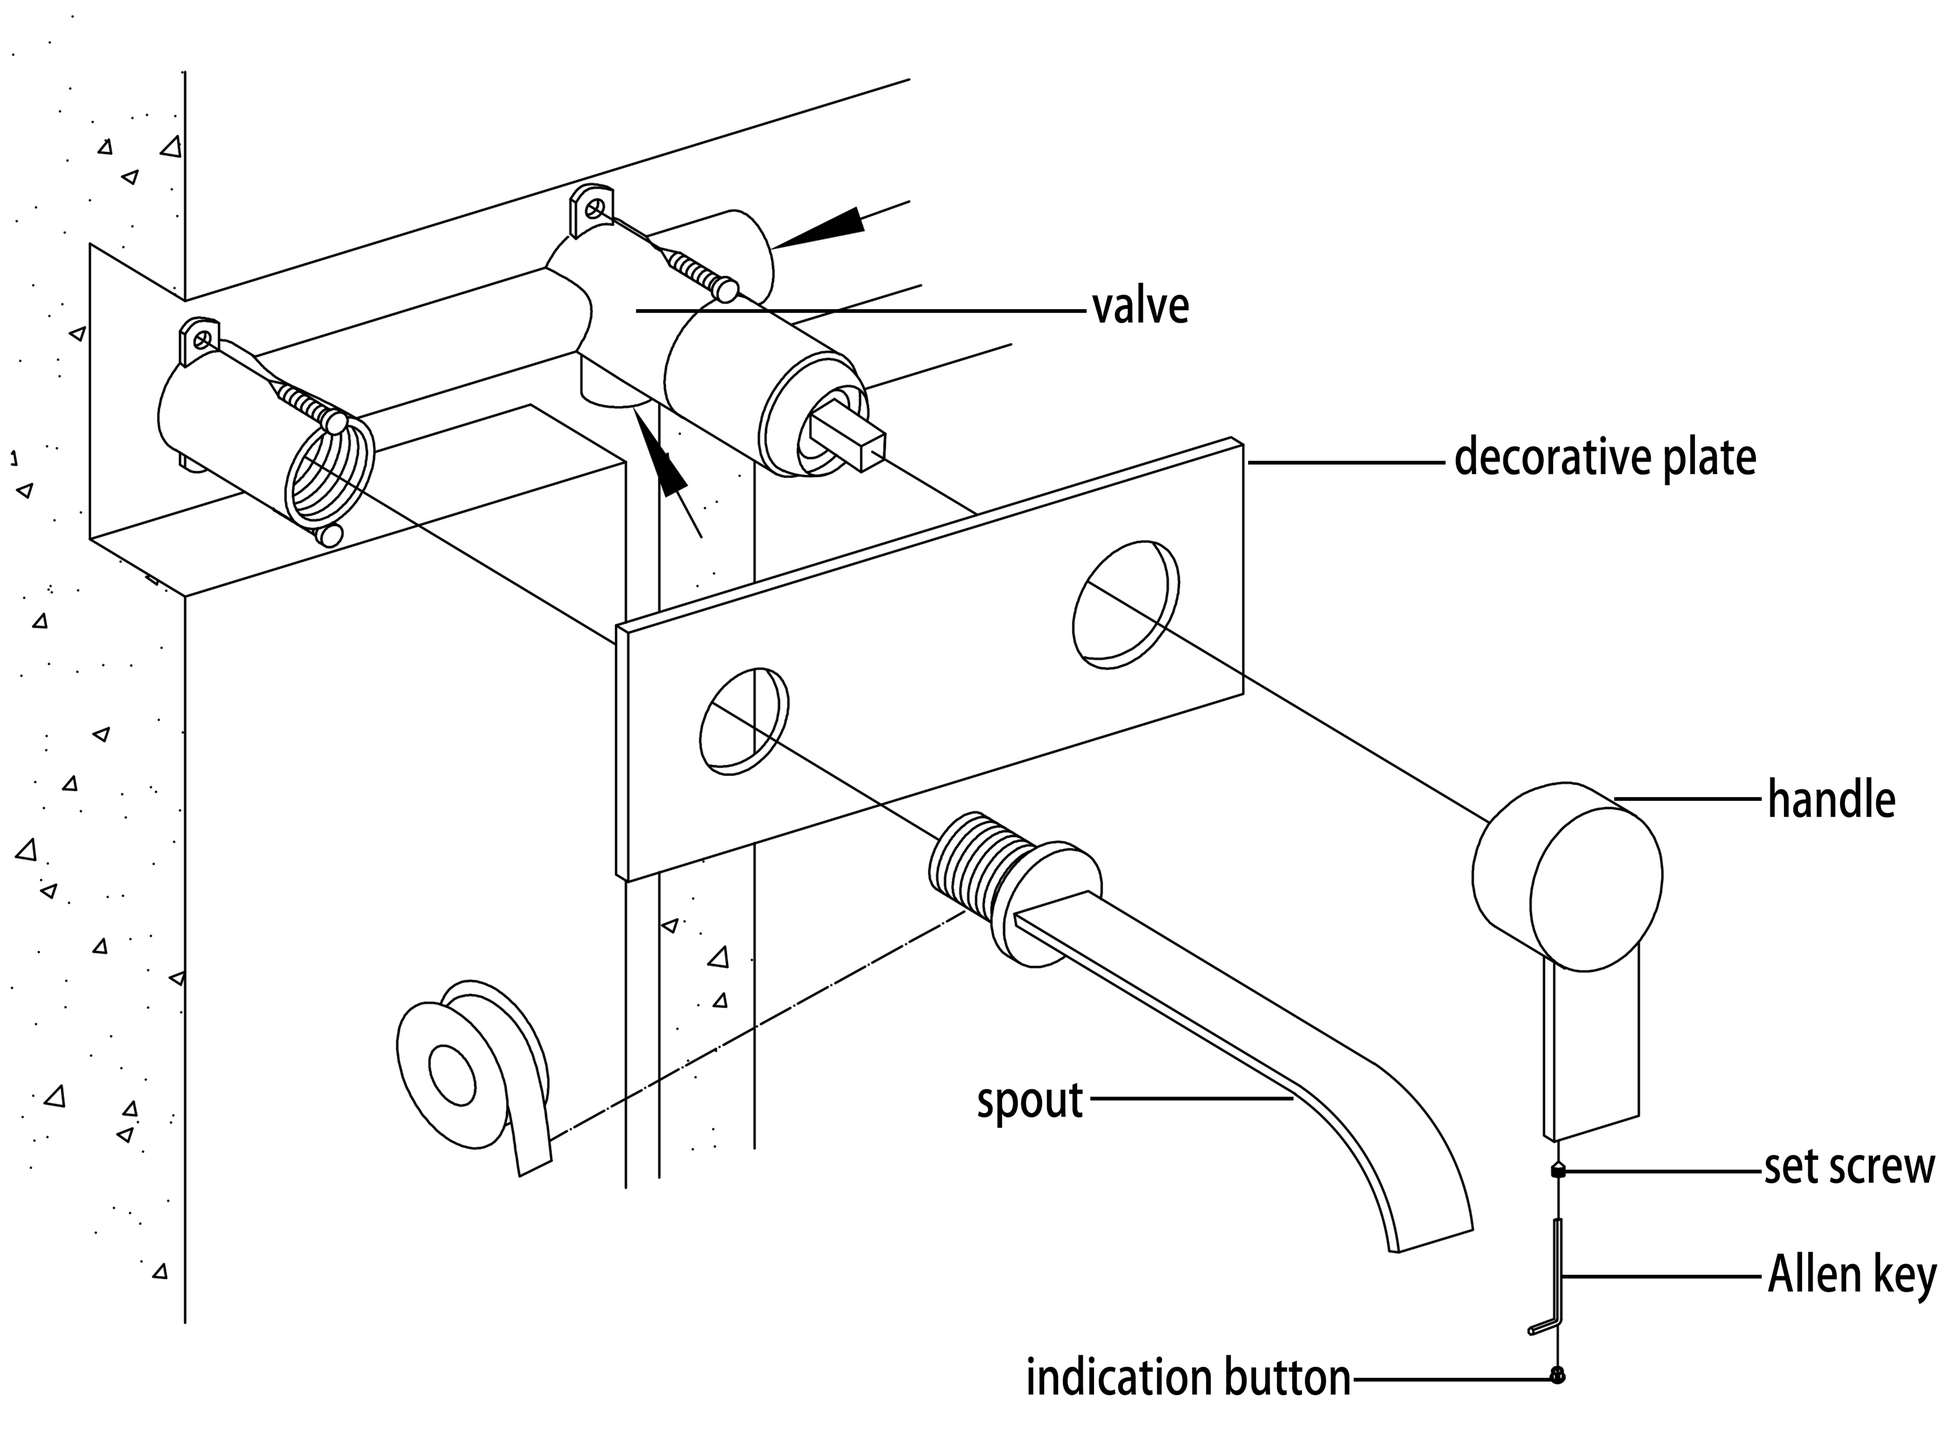


1. Position and fix the valve body into the wall. Make sure the valve body is completely level.
2. Connect hot and cold water inlets of the valve body to the main water supply. (Solid copper pipes are recommended for the connection.)
3. Place decorative plate onto the valve body and press it firmly against the finished wall.
4. Apply Teflon tape to the thread of the spout. Then screw the spout into the valve tightly.
5. Place the handle and fix the set screw with Allen key, then put on indication button.