Installation Instruction

Before You Begin

1. Shut off the main water supply.
2. Do not disassemble the main body, as it has been installed & commissioned correctly & precisely before leaving the factory.
3. To avoid the faucet from jamming, DO flush the water pipe before installation.
4. After installation, make sure every joint is safely sealed (NO LEAKAGE).
5. Make sure to connect the hot/cold inlet pipe correctly, if standing in front, hot water pipe connecting to the left and cold water pipe connecting to the right.
6. It is recommended that installation of the product be done by a professional plumber.

Cleaning & Maintenance

To keep product clean and shiny follow the instruction below.
1. Flush with clean water and dry with soft cloth only.
2. Do not use any detergent, polisher, sane-cloth, or a scraper.
3. Do not use acid detergent.

Installation

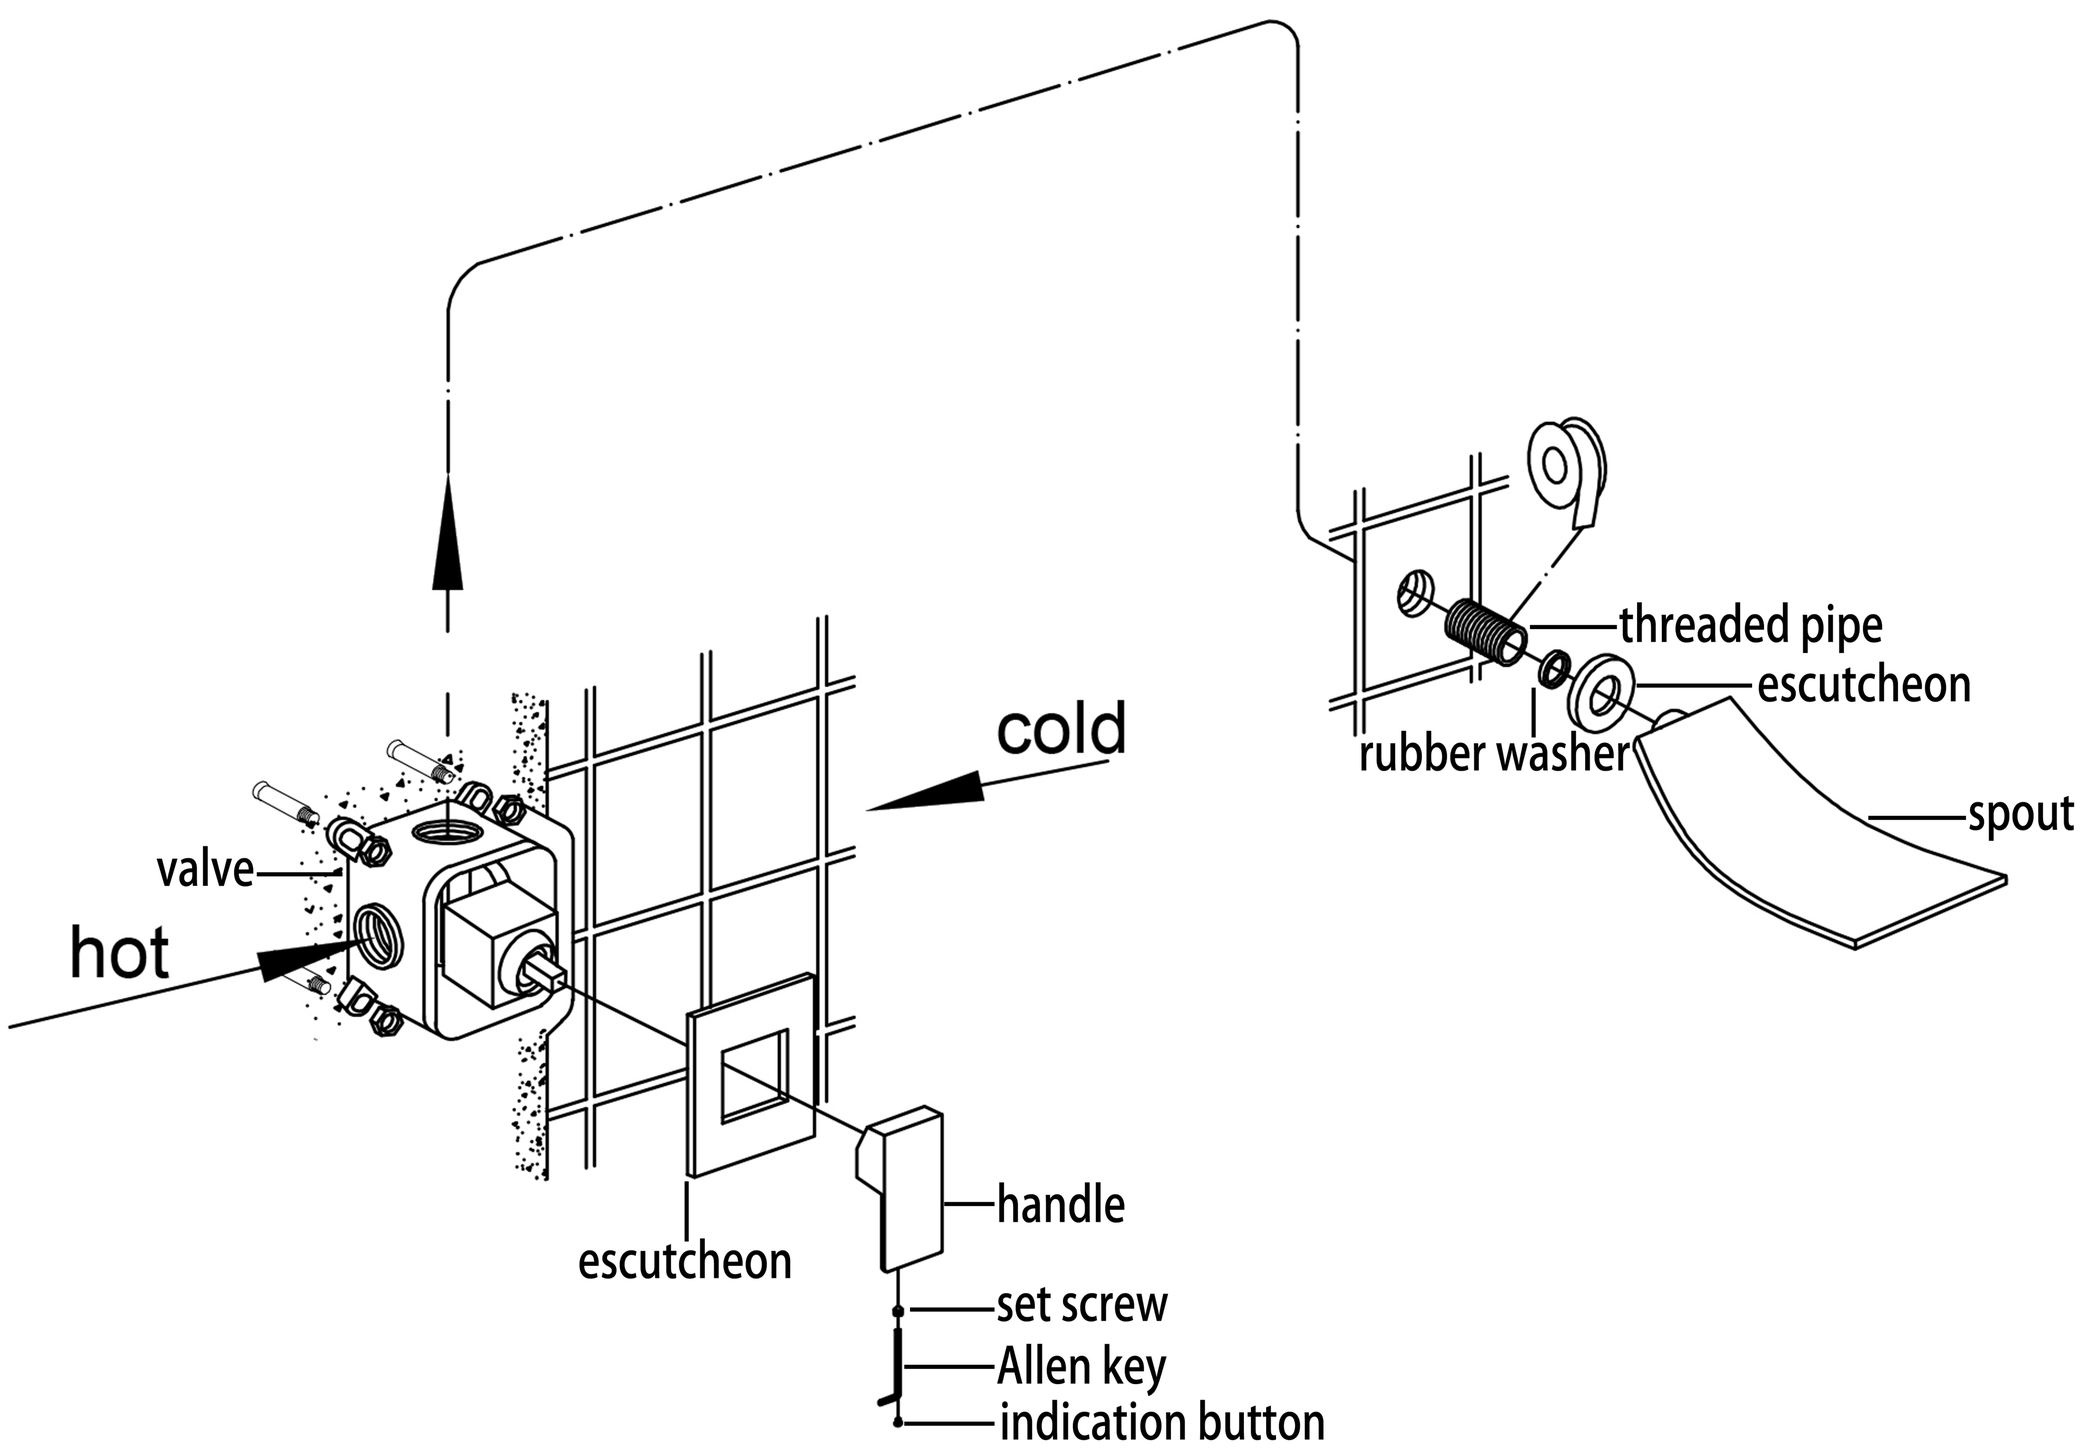

1. Fix the valve into the wall. Use a level to ensure that the valve is straight and level. (**Important:** Flush the water supply pipes to remove ant dirt and debris before installing the valve body.)
2. Wrap Teflon tape around the pipe threads. Connect hot and cold water supply lines and all the in-wall waterlines (not included) as desired to the valve.
3. Turn on the water supply and open the cartridge. Make sure that no leakage occurs. (**Note:** Test the water pressure after the pipe connections have been made and before the finished wall is completed.)
4. Removed the protective cover when the finished wall is completed. Install the escutcheon to the valve and press it against the finished wall.
5. Install the handle to the valve and tighten the set screw with Allen key. Then put on the indication button.
6. Add the rubber washer and screw the threaded pipe into the spout. Then apply Teflon tape to the threaded tail pipe and install the spout into the outlet on the wall through the escutcheon.

*We recommend using solid copper pipes instead of waterlines for connection and fix the pipes to the wall with fixing bracket.