



Wall Clock

General Guidlines

- Do not throw away packing materials until assembly is complete for small parts may come loose inside the carton during shipment. If parts are missing, please contact us.
- Assemble this item on a soft surface, such as carpet to protect the finish.
- During assembly,keep any small part out of reach of children as they may be fatal if swallowed or inhaled.Keep plastic packing bags out of reach of children to avoid any potential danger,such as suffocation.
- Avoid sharp objects and corrosive chemicals to prevent damage to the product or bodily injury.
- Clean with damp cloth. To protect the finish, avoid use chemicals and household cleaners.



Parts List

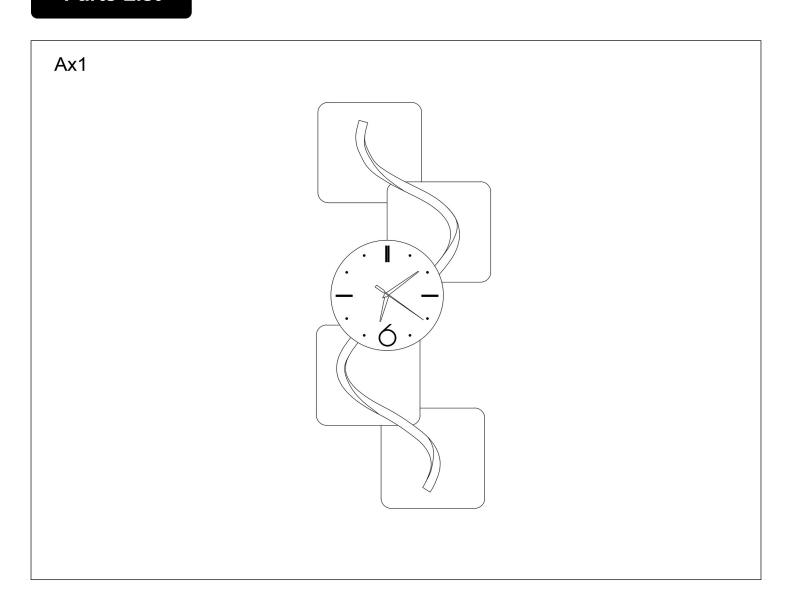



Accessories List

Bx4	Cx4

Exploded Views


EXPLODED

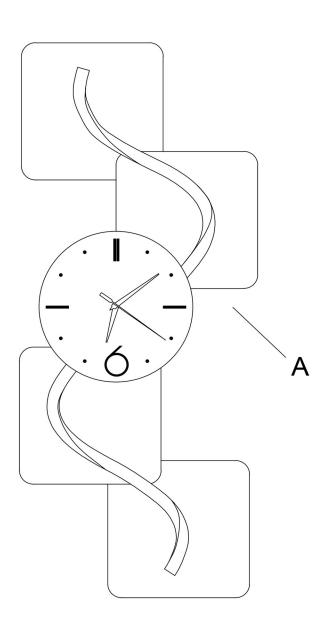

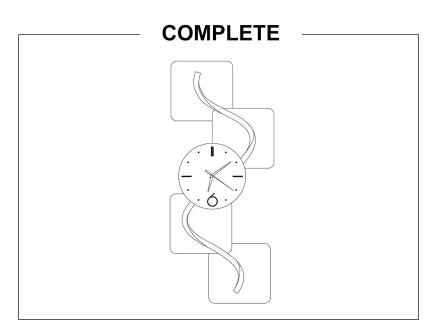

Installation Steps

Step 1

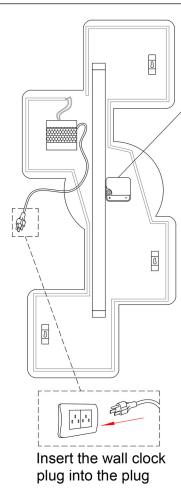


Battery installation


movement wheel

- 1. Battery selection, model: AA cell/battery, general size: diameter: 14mm, height: 49mm; Please use carbon dry battery (R6P), alkaline battery (LR6) or rechargeable battery is not recommended.
- 2. When unpacking and taking out the wall clock, do not directly turn the clock face upside down to the ground or the desktop, because it is easy to press the pointer to deform and damage the movement. Please check whether the pointers are deformed: there is no deformation or crossing between the pointers, which can follow the "-+" direction of the battery slot on the movement, and the battery is in the same direction, As shown in the figure above; Then remove the pointer protective housing, Adjust the pointer to the local time with the movement wheel.


Step 2

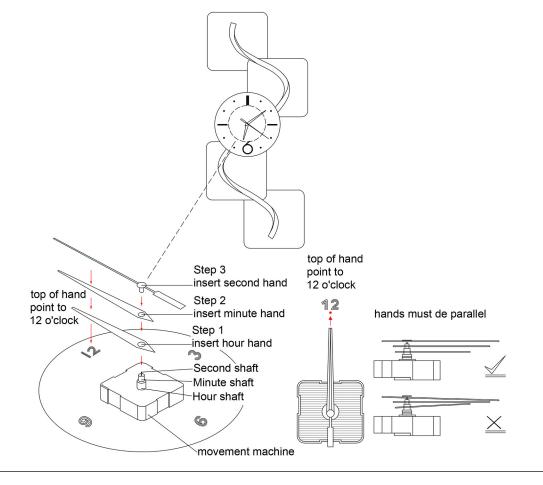

Step 3



Step 1:Mark the hole position on the wall with a pen,




Step 2: Punch holes at the marked positions with an electric drill, the depth of which is the length of the expanded rubber cap.


Step 4

B 2 x3





Step 3: Plug the expansion rubber cap into the hole.



Step 4: Nail the screw into the expanded rubber cap, with the nail head reserved for 5mm, and hang the product back hook on the screw to finish.