



# Installation Guide

Picture 1

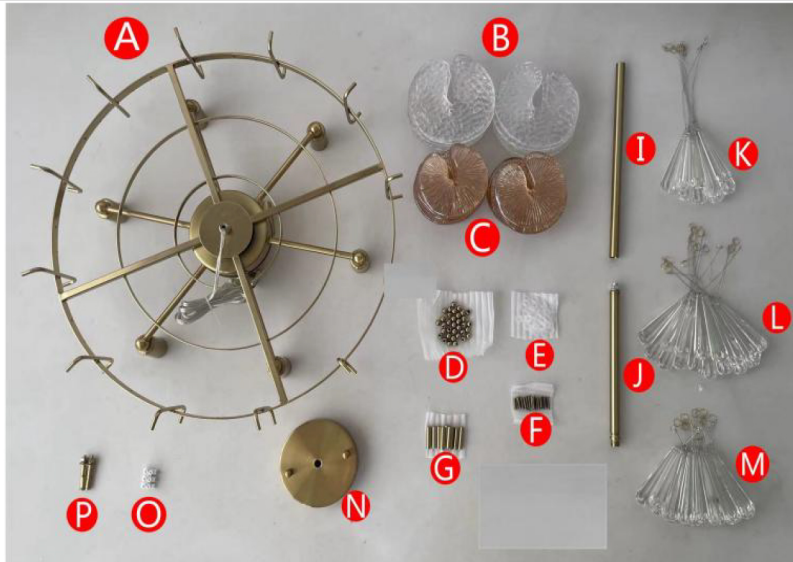


Parts List: A: light stand\*1; B: glazed glass\*12; C: teal glass\*24; D: 6mm round ball\*36; E: gasket\*36; F: 22mm Full tooth\*48; G: 30mm\*12; I: 300mm\*1; J: 200mm\*1; K: 250mm\*9; L: 200mm\*16; M: 150mm\*24; N: a set of installed ceiling panels\*1; O: wiring terminal\*1; P: expansion screws 50mm\*2

Picture 2

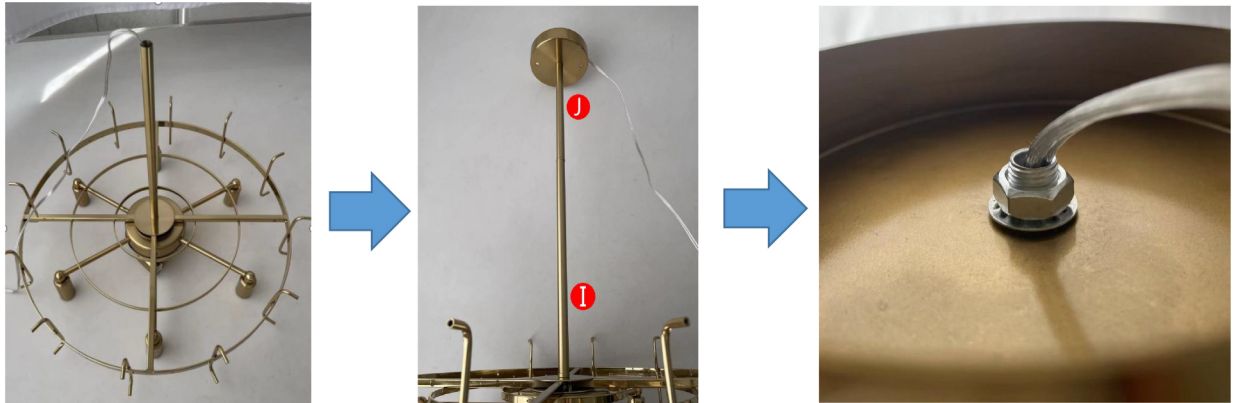

Step 1: According to the height of the house to choose the need to install the I J light pole height (picture installed two 200 + 300mm), connected to the light frame A and N accessories to tighten.

Picture 3

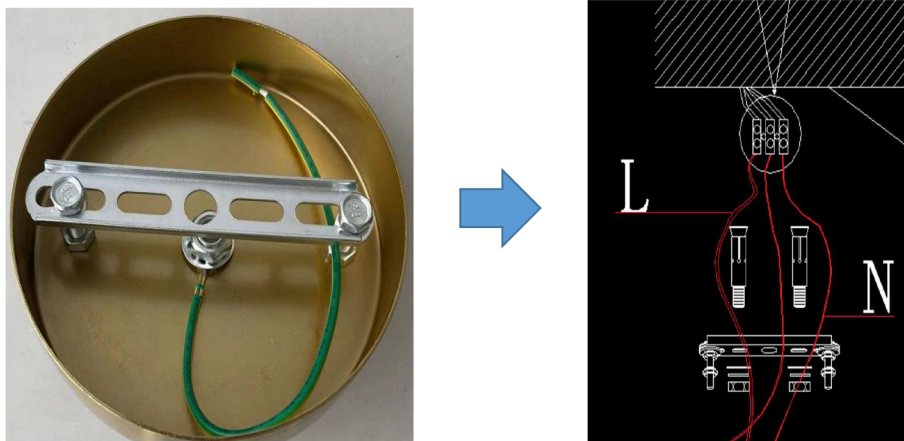

Step 2: After the luminaire test light works normally, remove the luminaire N inside the pegboard against the ceiling to make a hole distance mark, drill a hole with an electric drill and drive the P expansion screw into it.

<p>Picture 4</p> 	<p>Picture 5</p> 
<p>Step 3:Use accessories K corresponding to the number 1 and 2 (the second row of hanging holes), accessories L corresponding to the number 3 (the third row of hanging holes), accessories M corresponding to the number 4 (the fourth row of hanging holes), all hanging full.</p>	<p>Step 4:Fix C on A with accessories D, E, F.</p>
<p>Picture 6</p> 	<p>Picture 7</p> 
<p>Step 5:Use accessories D, E, G, F fixed B on A (shaped glass thickness is slightly different) when installing pay attention to the thin and thick, staggered installation to achieve balance.</p>	<p>Step 6:Use terminal O to connect to wire/earth wire and ceiling wire.Note the distinction between N and L wire.</p>
<p>Picture 8</p> 	
<p>Completion.</p>	